




Premier Authorized Dealer
 ILoca Services, Inc.
 1-888-736-4826
 www.semitrailers.net

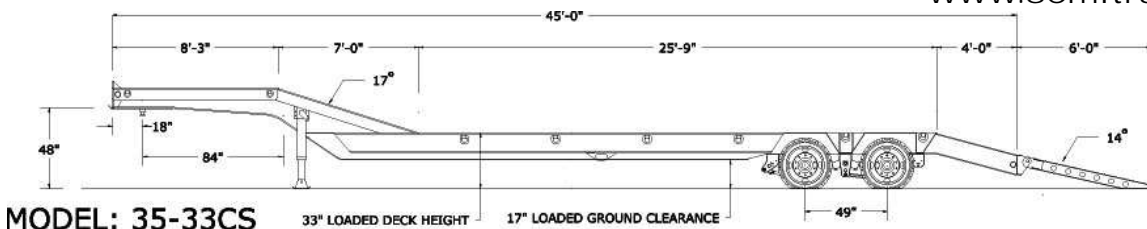

Model LB35-33CS

www.pittstrailers.com

STANDARD FEATURES

Load Capacity	70,000 lbs. In 16'
Weight	15,900 lbs.
Overall Length	45'
Width	8'6"
Deck Length	30' (26' Level Deck + 4' Dovetail)
Deck Height	33" Loaded
Gooseneck	Flat Deck Wood w/ 17 Degree Slope – Steel with Traction Bars
Fifth Wheel Height	48"
King Pin Swing Radius	84"
King Pin Setting	18"
Mainframe	14" Wide Flange-Mill Roll "I" Beam
Side Rails	12" Wide Flange-Mill Roll "I" Beam
Cross Members	8" Wide Flange-Mill Roll "I" Beam
Wheel Wells	Covered with Check Plate & Traction Bars
Dovetail	48" Covered with Check Plate & Traction Bars
Loading Ramps	Spring Assist, 24" x 72"
Landing Gear	Two Speed, 50,000 lbs. Capacity
Lashing Rings	8 Per Side (16 total)
Decking	Full 1-3/4" Oak
Suspension	Hutch 3 Point, Four Spring w/ 14,000 lbs Cap Springs
Axles	25,000lbs cap 77.5" Track, Auto Slack Adjust, Type 30 Brake Chambers, outboard drums, ABS anti-lock brake system
Brakes	12 1/4" x 7 1/2"
Tires	235/75R17.5 Low Profile Radials
Wheels	6.75 x 17.5 Steel Disc
Wiring	DOT Sealed Wiring Harness Sealed Lights Rubber Mounted
Tool Box	Covered in Gooseneck
Mud Flaps	Spray Guard and Anti-Sail
Flag Holders	On All Four Corners
Paint	Black (Two Part Primer w/ Two Part Polyurethane Paint)

NOTE ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WEIGHTS AND DIMENSIONS ARE APPROXIMATE

OPTIONAL EQUIPMENT

GOOSENECK

- Revolver Greaseless Coupling System (Eliminates Need To Grease 5th Wheel) _____
- Motor Grader Ramps - Wood Filled in lieu of Check Plate _____
- Flat Top w/ Steel Check Plate _____
- 90 degree Gooseneck With Flat Upper Deck - Wood Filled _____

MAINFRAME – Fabricated – “I” Beam with Positive Camber

DECK

- Additional Length in Deck Area _____
- Additional Width 9' includes 83.5" Track Axle _____
- 10' includes 95.5" Track Axle _____
- Widening Brackets _____
- Apitong (In Lieu of Oak) _____
- Floor Clips (In Lieu of Screws) _____

BOGIE

- Type 30/30 Spring Brakes (Per Axle) _____
- Aluminum Wheels (Outside Polished) _____
- Single Point 50,000 lb. Cap. _____
- Air Ride 50,000 lb. Cap. _____
- Dovetail Covered with Wood in Lieu of Check Plate _____
- 60" Dovetail Covered with Check Plate & Traction Bars _____
- Rear Hydraulic Ramps (36" x 96") _____
- Double Folding (36" x 144") _____

Premier Authorized Dealer
 ILoca Services, Inc.
 1-888-736-4826
 www.semitrailers.net